

➤ Features

- Size 0.04*0.02 inch /1.0*0.5 mm
- RoHS compliant, lead-free and halogen-free
- Fast response to fault current
- Low resistance
- Low-profile
- Compatible with high temperature solders

➤ Applications

- Computer, Mobile phones, Multimedia
- Automotive, Industrial controls, Telephony and broadband
- Game machines, Portable electronics, Battery

➤ Electrical Characteristics (25°C)

Part Number	I_{hold}	I_{trip}	V_{max}	I_{max}	P_d	Time to trip		R_i	R_{1max}
	(A)	(A)	(V)	(A)	(W)	(A)	(Sec)	(Ω)	(Ω)
BSMD0402L-010	0.10	0.30	6.0	40	0.5	0.50	1.00	0.150	2.000
BSMD0402L-020	0.20	0.50	6.0	40	0.5	1.00	1.00	0.100	1.250
BSMD0402L-035	0.35	0.70	6.0	40	0.5	8.00	0.10	0.050	0.700
BSMD0402L-050	0.50	1.00	6.0	40	0.5	8.00	0.10	0.040	0.400

I_{hold} = Hold current: maximum current device will pass without tripping in 25°C still air.

I_{trip} = Trip current: minimum current at which the device will trip in 25°C still air.

V_{max} = Maximum voltage device can withstand without damage at rated current (I_{max})

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max})

$P_{d\ typ.}$ = Typical power dissipated from device when in the tripped state at 25°C still air.

R_{min} = Minimum resistance of device in initial (un-soldered) state.

R_{1max} = Maximum resistance of device at 25°C measured one hour after tripping or reflow soldering of 260°C for 20 sec.

Caution: Operation beyond the specified ratings may result in damage and possible arcing and flame.


➤ WARNING

- Users shall independently assess the suitability of these devices for each of their applications.
- Operation of these devices beyond the stated maximum ratings could result in damage to the devices and lead to electrical arcing and/or fire.
- These devices are intended to protect against the effects of temporary over-current or over-temperature conditions and are not intended to perform as protective devices where such conditions are expected to be repetitive or prolonged in duration.
- Exposure to silicon-based oils, solvents, electrolytes, acids, and similar materials can adversely affect the performance of these PPTC devices.
- These devices undergo thermal expansion under fault conditions, and thus shall be provided with adequate space and be protected against mechanical stresses.
- Circuits with inductance may generate a voltage ($L di/dt$) above the rated voltage of the PPTC device.

➤ Thermal Derating Chart

Part Number	Ambient operating temperature hold current(I_{hold})							
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C
BSMD0402L-010	0.14	0.13	0.11	0.10	0.09	0.08	0.07	0.06
BSMD0402L-020	0.29	0.26	0.23	0.20	0.18	0.16	0.15	0.13
BSMD0402L-035	0.50	0.45	0.40	0.35	0.31	0.28	0.26	0.22
BSMD0402L-050	0.71	0.64	0.57	0.50	0.44	0.40	0.37	0.31

➤ **Soldering Parameters**

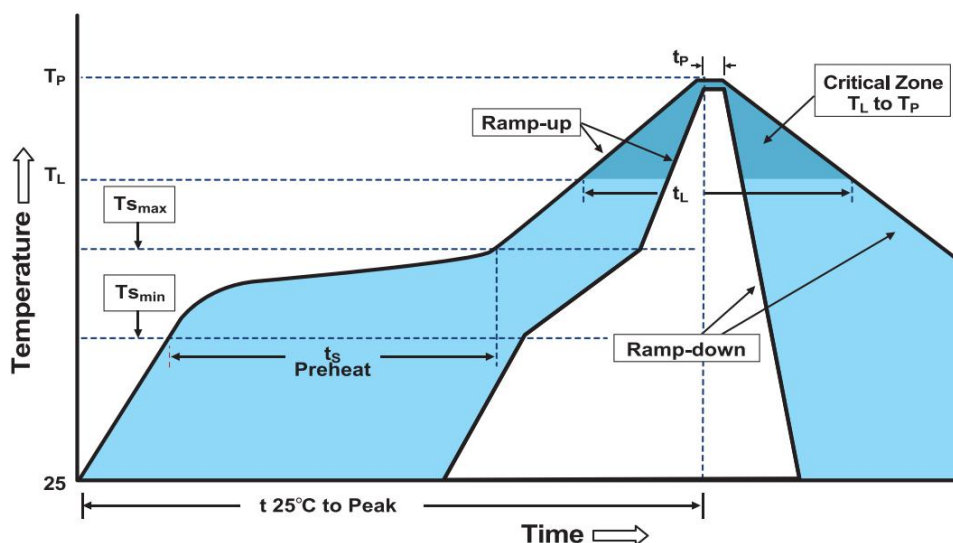

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate(T_{smax} to T_p)	3°C/second max
Preheat	
-Temperature Min(T _{smin})	150°C
-Temperature Max(T _{smax})	200°C
-Time(T _{smin} to T _{smax})	60~180 seconds
Time maintained above:	
-Temperature(T _L)	217°C
-Time(t _L)	60~150 seconds
Peak Temperature(T_p)	260°C
Ramp-Down Rate	6°C/second max
Time 25°C to Peak Temperature	8 minutes max
Storage Condition	0°C~30°C,30%-60%RH

- Recommended reflow methods: IR, vapor phase oven, hot air oven, N2 environment for lead-free.
- Recommended maximum paste thickness is 0.25mm.
- Devices can be cleaned using standard industry methods and solvents.


Note 1: All temperature refer to topside of the package, measured on the package body surface.

Note 2: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

➤ **Environmental Specifications**


Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs.	±5% typical
Humidity aging	+85°C, 85% R.H. , 168 hours	±5% typical
Thermal shock	+85°C to -40°C, 20 times	±33% typical
Resistance to solvent	MIL-STD-202,Method 215	No change
Vibration	MIL-STD-202,Method 201	No change
Ambient operating conditions : - 40 °C to +85 °C		
Maximum surface temperature of the device in the tripped state is 125 °C		

➤ **Physical Dimensions & Recommended Pad Layout (mm)**

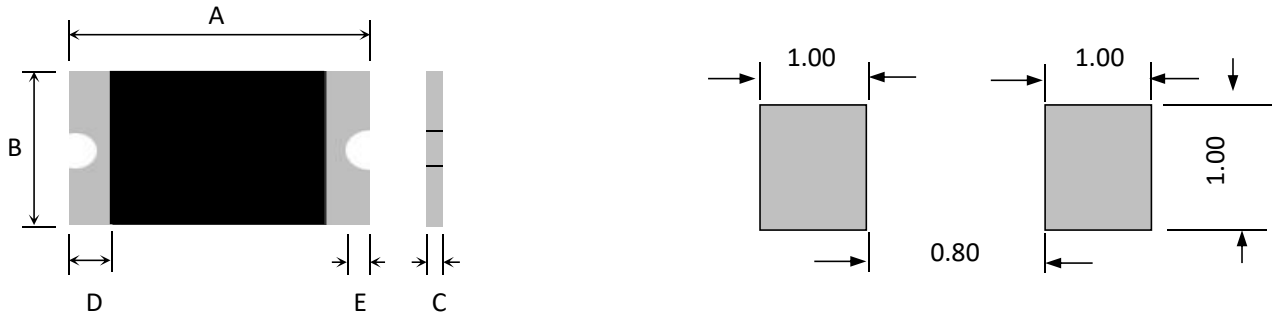


Part Number	Quantity	A		B		C		D	E
		Min	Max	Min	Max	Min	Max	Min	Min
BSMD0402L-010	10000	--	1.15	--	0.65	--	0.60	0.10	0.40
BSMD0402L-020	10000	--	1.15	--	0.65	--	0.60	0.10	0.40
BSMD0402L-035	10000	--	1.15	--	0.65	--	0.60	0.10	0.40
BSMD0402L-050	10000	--	1.15	--	0.65	--	0.60	0.10	0.40

➤ **Tape And Reel Specifications (mm)**

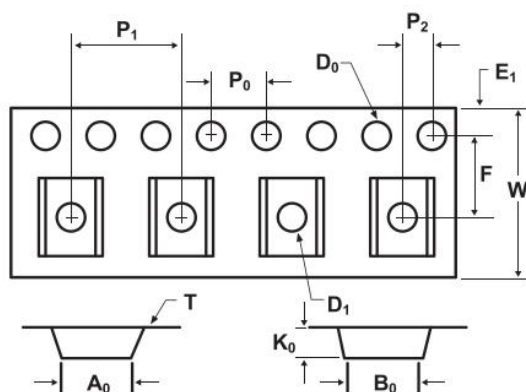

Governing Specifications	BSMD0402L-010 ~ BSMD0402L-050
W	8.0 ± 0.3
F	3.5 ± 0.05
E1	1.75 ± 0.1
D0	1.55 ± 0.05
D1	1.0 ± 0.1
P0	4.0 ± 0.1
P1	4.0 ± 0.1
P2	2.0 ± 0.05
A0	1.10 ± 0.1
B0	1.95 ± 0.1
T	0.2 ± 0.1
K0	0.74 ± 0.1
Leader _{min}	390
Trailer _{min}	160

Reel Dimensions	
C	φ178 ± 1.0
D	φ60.2 ± 0.5
H	11.0 ± 0.5
W	9.0 ± 1.5

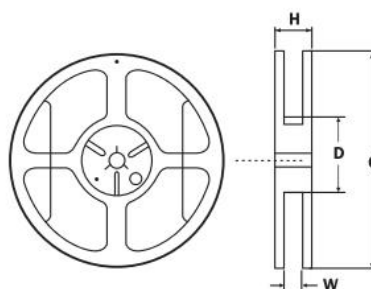

➤ **Contact information**

SHENZHEN HCHC ELECTRONIC CO., LTD

TEL: 0755-85259917 FAX: 0755-28704432

E-MAIL: sale@hchc-elec.com